





Vanasse Hangen Brustlin, Inc.



Transportation
Land Development
Environmental Services

10 Dorrance Street, Suite 400
Providence, Rhode Island 02903
401.272.8100 • FAX 401.273.9694





- Notes:**
1. INSTALL SILTSACK IN ALL CATCH BASINS WHERE INDICATED ON THE PLAN BEFORE COMMENCING WORK OR IN PAVED AREAS AFTER BINDER COURSE IS PLACED AND HAY BALES HAVE BEEN REMOVED.
 2. GRATE TO BE PLACED OVER SILTSACK.
 3. SILTSACK SHALL BE INSPECTED PERIODICALLY AND AFTER ALL STORM EVENTS AND CLEANING OR REPLACEMENT SHALL BE PERFORMED PROMPTLY AS NEEDED. MAINTAIN UNTIL UPSTREAM AREAS HAVE BEEN PERMANENTLY STABILIZED.

Silt sack Sediment Trap 6/08
N.T.S. Source: VHB LD_674

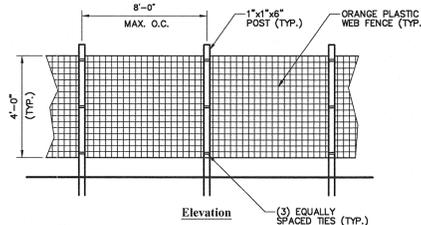


- Notes:**
1. INSTALL TREE PROTECTION FENCE AT THE DRIP LINE OF EXISTING TREES TO REMAIN.

Tree Protection Fence 6/08
N.T.S. Source: VHB LD_610




- Notes:**
1. ENTRANCE WIDTH SHALL BE A TWENTY-FIVE (25) FOOT MINIMUM, BUT NOT LESS THAN THE FULL WIDTH AT POINTS WHERE INGRESS OR EGRESS OCCURS.
 2. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION WHICH SHALL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHTS-OF-WAY. THIS MAY REQUIRE PERIODIC TOP DRESSING WITH ADDITIONAL STONE AS CONDITIONS DEMAND AND REPAIR OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT. ALL SEDIMENT SPILLED, DROPPED, WASHED OR TRACKED ONTO PUBLIC RIGHTS-OF-WAY MUST BE REMOVED IMMEDIATELY. BERM SHALL BE PERMITTED. PERIODIC INSPECTION AND MAINTENANCE SHALL BE PROVIDED AS NEEDED.
 3. STABILIZED CONSTRUCTION EXIT SHALL BE REMOVED PRIOR TO FINAL FINISH MATERIALS BEING INSTALLED.


Stabilized Construction Exit 6/08
N.T.S. Source: VHB LD_682

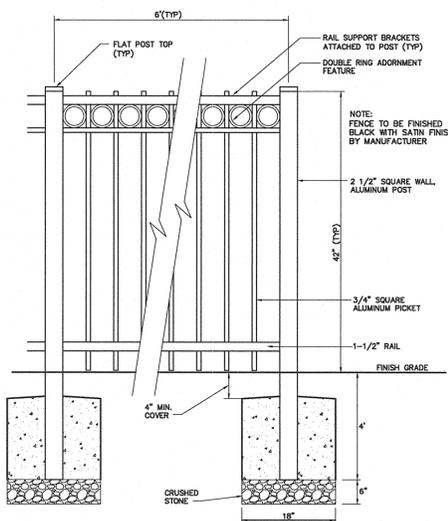


42" Ornamental Railing 6/08
N.T.S. Source: VHB

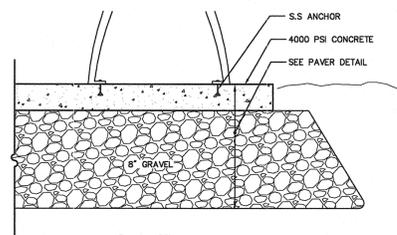


Bench Installation on Concrete Pavement 11/09
N.T.S. Source: VHB REV

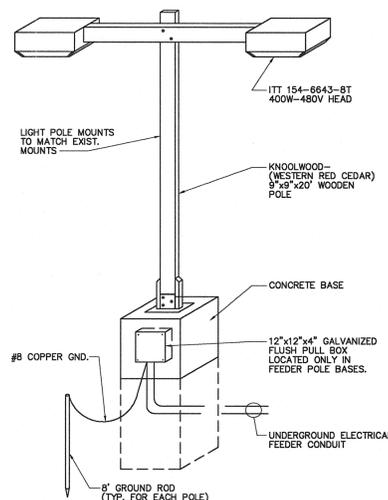


Light Pole 6/08
N.T.S. Source: VHB LD_311

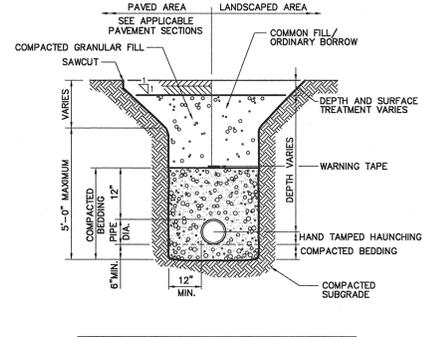

Utility Trench 8/11
N.T.S. Source: VHB LD_300

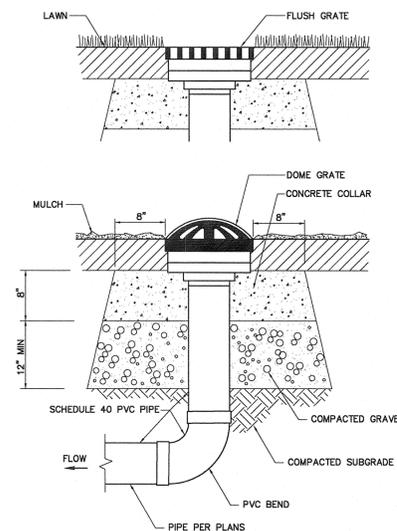

Yard Drain (YD) 6/08
N.T.S. Source: VHB REV LD_193

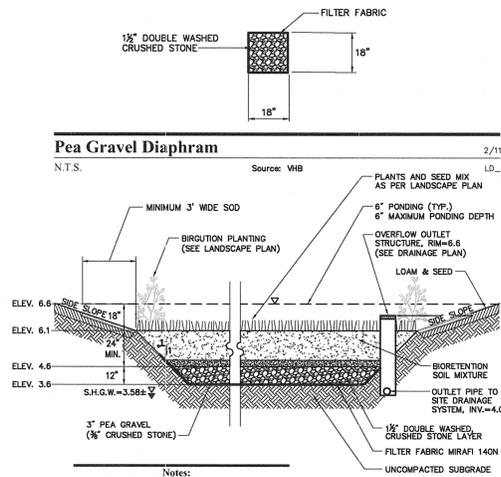

- Notes:**
1. SIDE SLOPES SHALL BE 3:1 MAX. 2% MIN.

Bioretention Basin (Biofiltration Basin) 6/08
N.T.S. Source: VHB REV LD_353

WOOD FENCE

ORNAMENTAL RAIL
DETAIL

SPECIAL
PAVEMENT ART

1	TOWN COMMENTS	1/9/13	
No.	Revision	Date	Apprv.

Police Cove Park

County Road, RI Route 114
Barrington, RI
Issued for
Permitting

Not Approved for Construction

Site Details 2

JONATHAN B. STABACH
No. 7794
1-9-13
REGISTERED
PROFESSIONAL ENGINEER
(CIVIL)

Drawing Number
C-6
Sheet of
6 9
Project Number
72145.00